
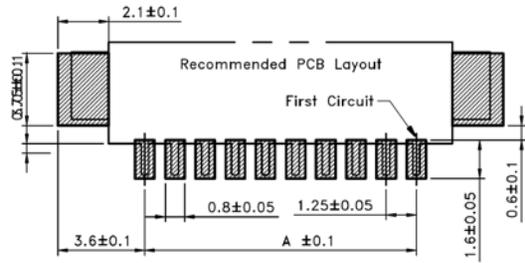




1 2 3 4 5 6 7 8 9

A



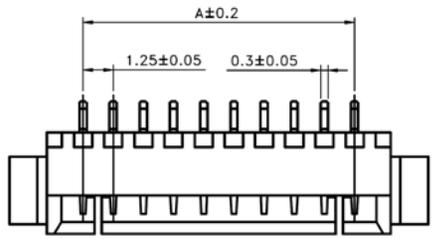


B

C

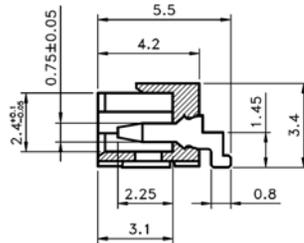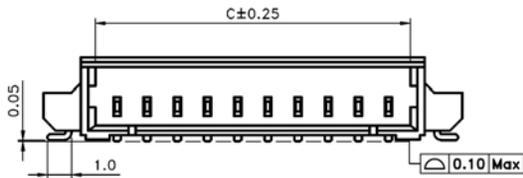

D

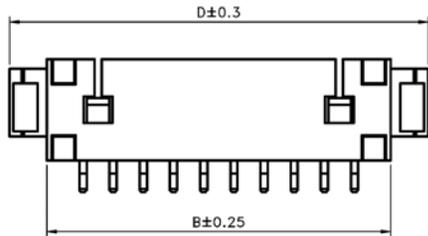

E

F

RoHS compliant

SPECIFICATIONS

Current Rating: 1A AC/DC
 Withstanding: 250V AC/minute
 Insulation Resistance: 100mΩ min
 Temperature Range: -40C to +85C
 Contact Resistance: 20mΩ max
 Contact Material: Brass, Tin Plating
 Base Material: Nylon PA46 UL94V-0
 Plating Material: Ni30u" Sn 120u" over all

Dimensions				
Item	A	B	C	D
2	1.25	4.25	3.05	7.10
3	2.50	5.50	4.30	8.35
4	3.75	6.75	5.55	9.60
5	5.00	8.00	6.80	10.85
6	6.25	9.25	8.05	12.10
7	7.50	10.50	9.30	13.35
8	8.75	11.75	10.55	14.60
9	10.00	13.00	11.80	15.85
10	11.25	14.25	13.05	17.10
11	12.50	15.50	14.30	18.35
12	13.75	16.75	15.55	19.60
13	15.00	18.00	16.80	20.85
14	16.25	19.25	18.05	22.10
15	17.50	20.50	19.30	23.35

G

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/12/05
				Checked	Lizzy	05/12/05
				Drawn	Tina	05/12/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-1147H-XX**

Description: 1.25mm Crimp Style Connector Wafer SMT

1 2 3 4 5 6 7 8 9